

# DURACELL®


RECHARGEABLE ACCU

ActiveCharge

## AA PRE-CHARGED (DX1500)

Rechargeable NiMH Battery

Retain Power For Up To 365 Days While Not In Use,  
Unlike Regular Rechargeables!

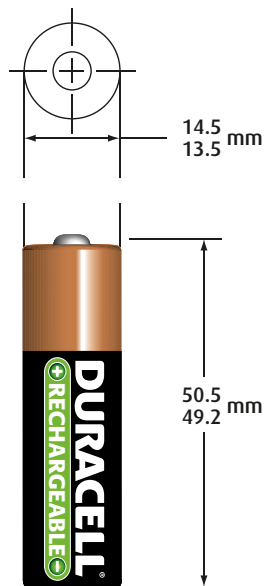


Dimensions shown are IEC standards


### Specifications

Nominal Voltage:	1.2V
Nominal Internal Impedance:	14 m-ohm @ 1 kHz
Rated Capacity:	2000 mAh
Average Weight:	30.2 grams (1.07 ounces)
Volume:	8.3 cm <sup>3</sup> (0.50 in <sup>3</sup> )
Terminals:	Flat
Operating Temperature Range:	-20° C to 50° C (-4° F to 122° F)
ANSI:	1.2H2
IEC:	HR6

#### LOW RATE DISCHARGE

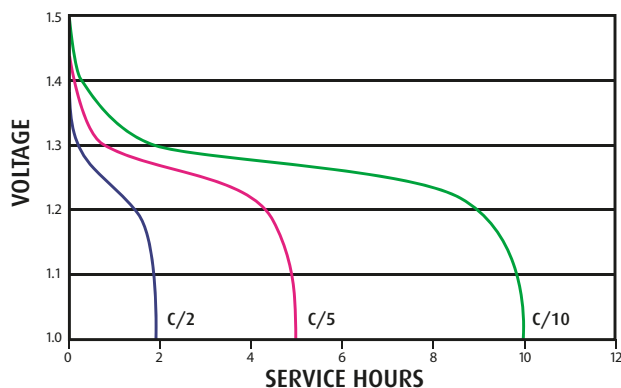

#### HIGH RATE DISCHARGE

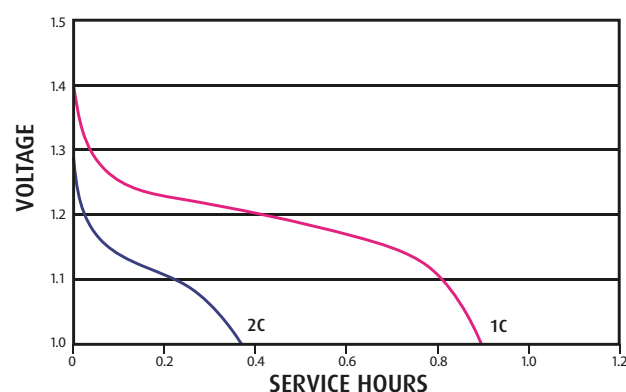

Product can be charged on most NiMH or NiCd chargers utilizing standard dV, dV/dt, time and temperature dynamic charge termination methods. Duracell brand NiMH chargers are recommended for best results.

Delivered capacity is dependent on the applied load, operating temperature, and cut-off voltage. Please refer to the charts and discharge data shown for example of the energy/service life that the battery will provide for various local conditions.

This data is subject to change. Performance information is typical. Contact Duracell for latest information.

DURACELL®  
RECHARGEABLE ACCU

Berkshire Corporate Park  
Bethel, CT 06801 U.S.A.

Telephone Toll-free:  
(Global) 1-203-796-4500

Internet: [www.duracell.com](http://www.duracell.com)