



Nominal Voltage:	1.2 V
Nominal Internal Impedance:	30 m-ohm @ 1kHz
Average Weight:	61.0 gm (2.15 oz.)
Volume:	26.9 cm ³ (1.64 in. ³)
Terminals:	Flat
Operating Temperature Range:	-20°C to 50°C (-4°F to 122°F)
ANSI:	1.2H3
IEC:	HR14


Fast Charge (Charge Control required)

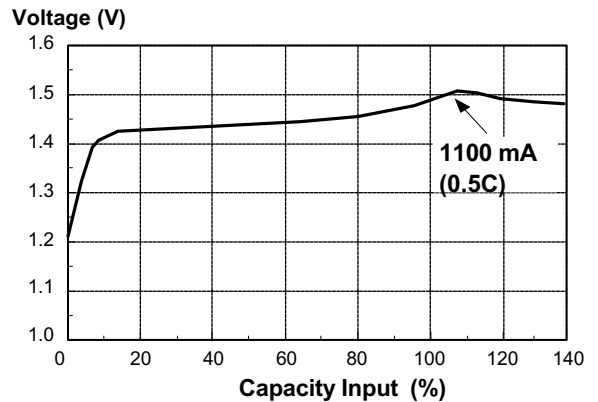

Low Rate Discharge

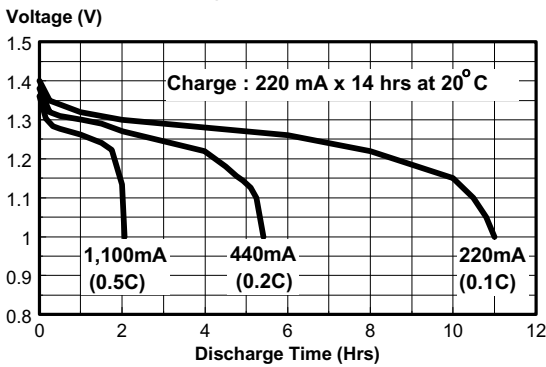

High Rate Discharge

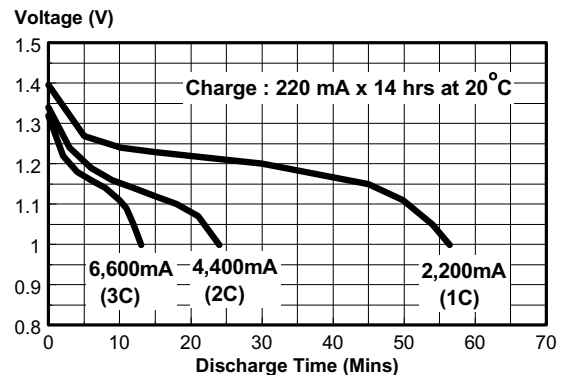

DURACELL®
BATTERIES

Berkshire Corporate Park
Bethel, CT 06801 U.S.A.
Telephone: Toll-free 1-800-544-5454
Internet: www.duracell.com

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.