


DURACELL®

RECHARGEABLE

AA 2400 mAh (DC1500)

Rechargeable NiMH Battery

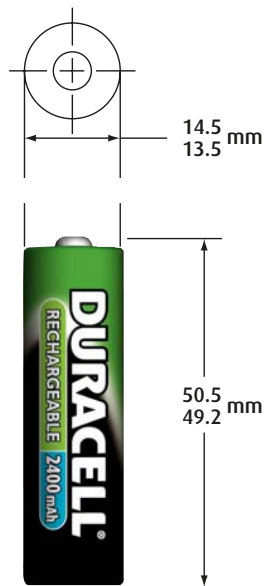


Dimensions shown are IEC standards

Long Lasting in Digital and High Drain Devices!


Specifications

Nominal Voltage:	1.2V
Nominal Internal Impedance:	14 m-ohm @ 1 kHz
Average Weight:	28 grams (0.99 ounces)
Volume:	8.3 cm ³ (0.50 in ³)
Terminals:	Flat
Operating Temperature Range:	-20° C to 50° C (-4° F to 122° F)
ANSI:	1.2H2
IEC:	HR6

LOW RATE DISCHARGE

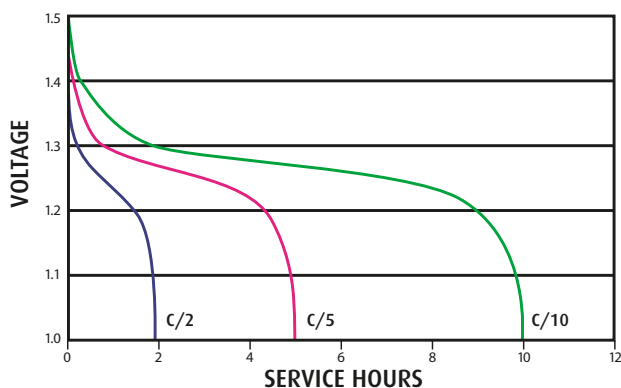

HIGH RATE DISCHARGE

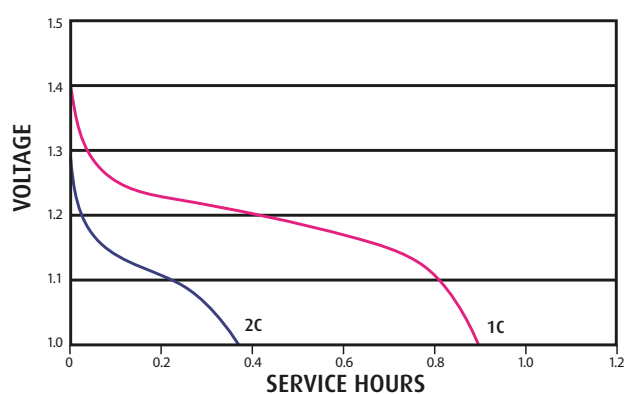

Product can be charged on most NiMH or NiCd chargers utilizing standard dV, dV/dt, time and temperature dynamic charge termination methods. Duracell brand NiMH chargers are recommended for best results.

Delivered capacity is dependent on the applied load, operating temperature, and cut-off voltage. Please refer to the charts and discharge data shown for example of the energy/service life that the battery will provide for various local conditions.

This data is subject to change. Performance information is typical. Contact Duracell for latest information.

DURACELL®
RECHARGEABLE

Berkshire Corporate Park
Bethel, CT 06801 U.S.A.
Telephone Toll-free:
(North America only) 1-800-544-5454
(Global) 1-203-796-4500
Internet: www.duracell.com