

DURACELL®


RECHARGEABLE ACCU

ActiveCharge

AAA PRE-CHARGED (DX2400)

Rechargeable NiMH Battery

Retain Power For Up To 365 Days While Not In Use,
Unlike Regular Rechargeables!

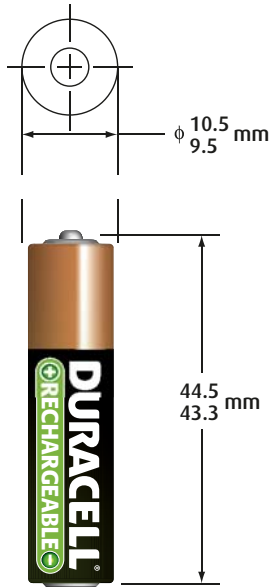


Dimensions shown are IEC standards


Specifications

Nominal Voltage:	1.2V
Nominal Internal Impedance:	35 m-ohm @ 1 kHz
Rated Capacity:	800 mAh
Average Weight:	12.8 grams (0.45 ounces)
Volume:	8.3 cm ³ (0.50 in ³)
Terminals:	Flat
Operating Temperature Range:	-20° C to 50° C (-4° F to 122° F)
ANSI:	1.2H1
IEC:	HR03

LOW RATE DISCHARGE

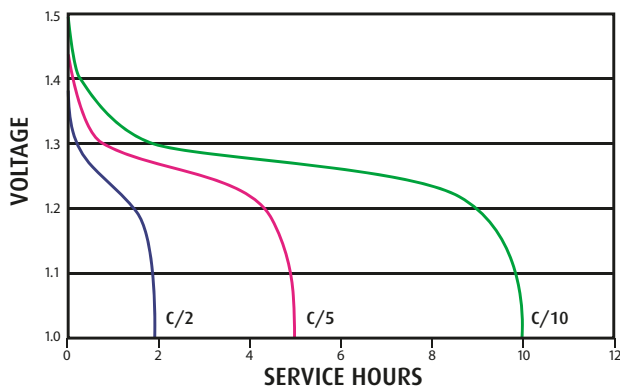

HIGH RATE DISCHARGE

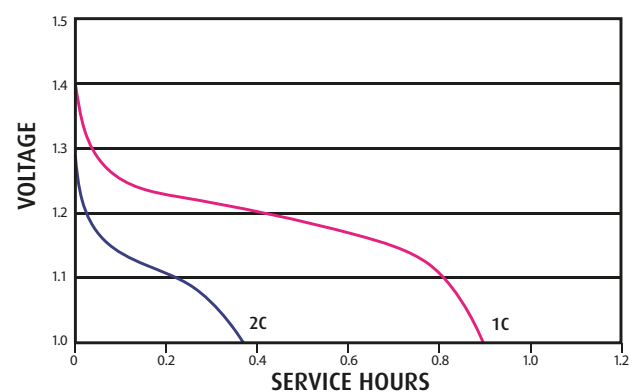

Product can be charged on most NiMH or NiCd chargers utilizing standard dV, dV/dt, time and temperature dynamic charge termination methods. Duracell brand NiMH chargers are recommended for best results.

Delivered capacity is dependent on the applied load, operating temperature, and cut-off voltage. Please refer to the charts and discharge data shown for example of the energy/service life that the battery will provide for various local conditions.

This data is subject to change. Performance information is typical. Contact Duracell for latest information.

DURACELL®
RECHARGEABLE ACCU

Berkshire Corporate Park
Bethel, CT 06801 U.S.A.

Telephone Toll-free:
(Global) 1-203-796-4500

Internet: www.duracell.com