



<b>Nominal Voltage:</b>	3.0 V
<b>Typical Voltage:</b>	3.1-3.3 V
<b>Nominal Internal Impedance:</b>	0.5 ohm @ 1kHz
<b>Average Weight:</b>	39 g
<b>Volume:</b>	21.9 cm. <sup>3</sup>
<b>Terminals:</b>	Flat, Recessed Terminal Nickel Plated Steel
<b>Operating Temp. Range:</b>	-20°C to 60°C (-4°F to 140°F)
<b>NEDA/ANSI:</b>	5047
<b>IEC:</b>	TBD

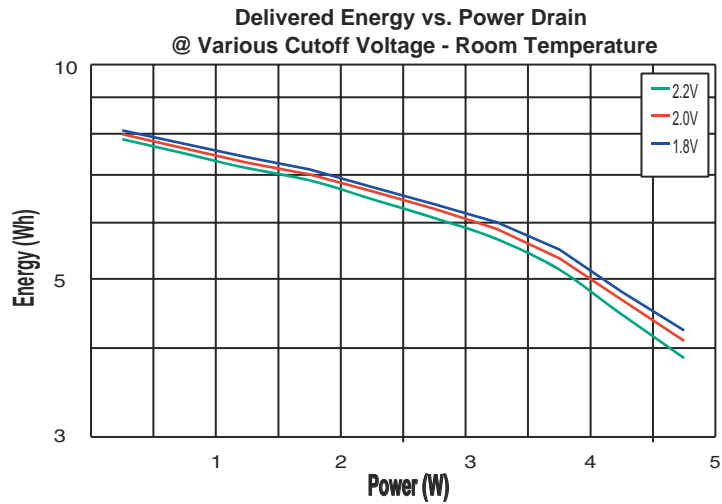


### Duracell Ultra CR-V3 Typical Performance

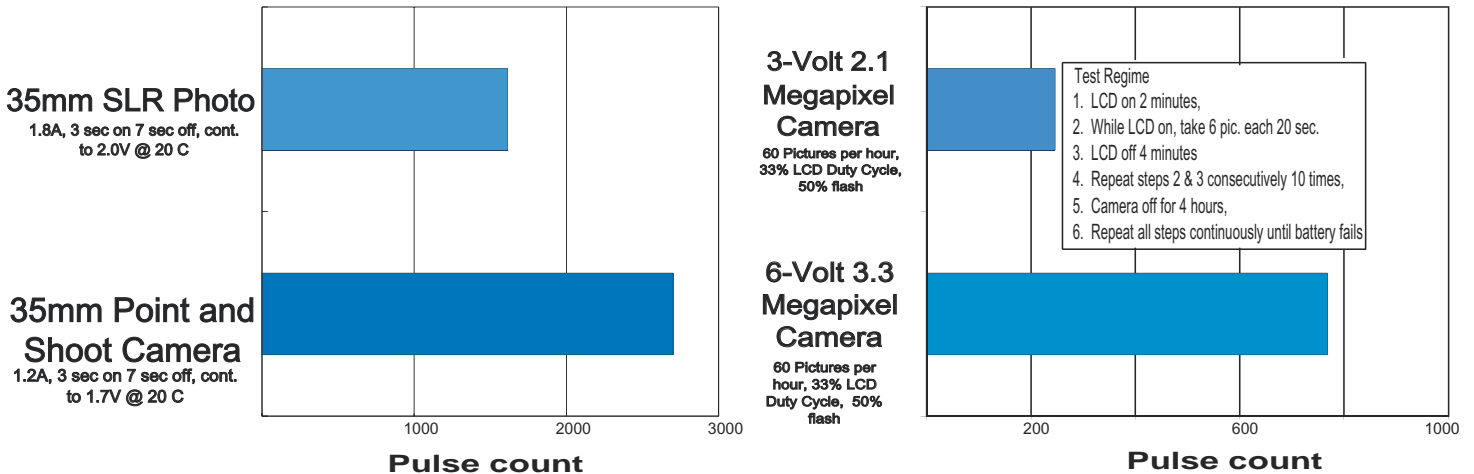


\* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.

**1.8 Amp, 3 Sec on / 7 sec off at Various Temperatures**

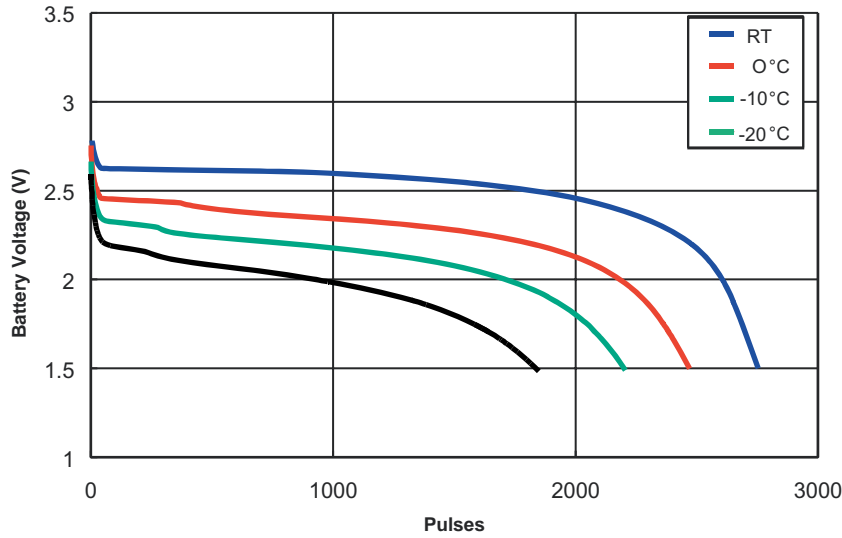

**1.2 Amp, 3 Sec On / 7 Sec off at Various Temperatures**

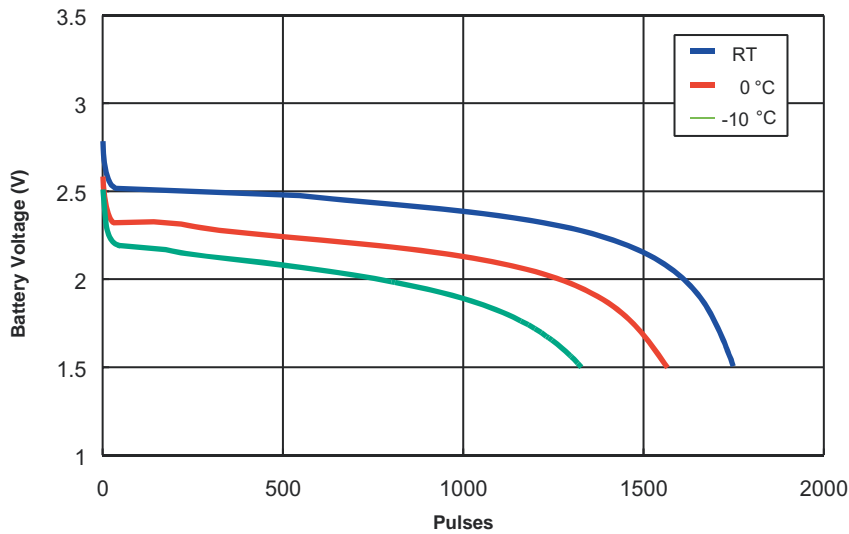

**DURACELL**  
BATTERIES

Berkshire Corporate Park  
Bethel, CT 06801 U.S.A.  
Telephone: Toll-free 1-800-544-5454  
Internet: www.duracell.com

\* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.